


VIEW A
9:1

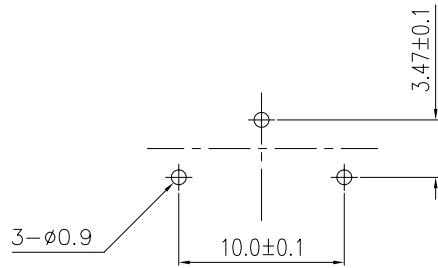

P.C. BOARD LAYOUT

NOTES:


*** Material**

Body: Nylon 66+30% G.F.
 Flammability UL 94V-0 Rated.
 Color: Black.
 Contact: Phosphor Bronze.
 Contact: Tin Plating Over Nickel or Copper.

*** Specification**

Application For 3V Lithium Battery.
 Dielectric Withstanding Voltage: 500 VDC
 Operation Temperature: -55°C To +105°C
 Durability: 50 Cycles Min.
 Contact Resistance: 30 Milliohms.

*** How to order:**

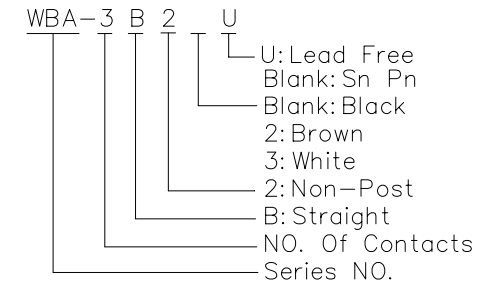

REV	Units	mm	Scale	2:1	Drawing By	Date	S. T. Enterprise CO., LTD Taipei Taiwan R. O. C. smt@order168.com				
	Tolerance Unless Otherwise Specified				Reviewed By	Date	Date	Sheet	1 of 1	Title	Straight Battery (Housing No Post)
	.X	~	±0.38								
	.XX	~	±0.25		Approval By	Date	Third Angle Projection		Drawing No.	REV	
	.XXX	~	±0.20								
	Angle	~	± 3°								