

PCB LAYOUT

NOTES:

MATERIAL:

Body:Nylon66 With glass Fiber

Contact:Phosphor Bronze

FINISH:

Contact:Tin 100u" plated over Ni30u" under-plating

SPECIFICATION:

Application:For 3V lithium battery(CR2032)

Insulator resistance:5000MΩMin

Operation temperature:-55°C to +105°C

Durability:50 cycles

Contact resistance:30 mΩ Max

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 4340-RT		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	90.10.28	UNIT MM	SHT 1 OF 1	SIZE A4
DGN	AMY	90.10.28			
DRW	SHIEH	90.10.28			

1

2

3

4

5

6

7

A

B

C

D

E





A

B


C

D

E

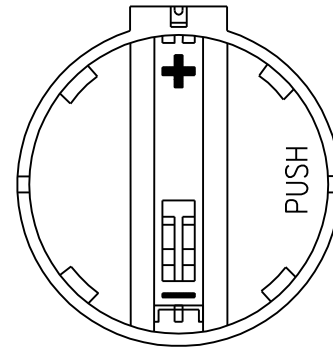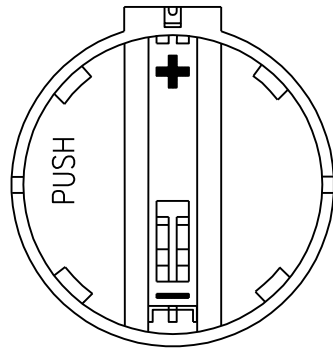

易昕企業有限公司  
LEAMAX ENTERPRISE CO., LTD.

PROJ		SCALE : F DO NOT SCALE DWG	MOLD NO 4340-RT-1		
APP			MODEL	FILE NO	REV. X1
CHK	CCJ	90.10.28			
DGN	AMY	90.10.28	UNIT	SHT 1 OF 1	SIZE A4
DRW	SHIEH	90.10.28	MM		

1

2

3

4

5

6

7