

## SPECIFICATION

FREQUENCY RANGE	12-40 MHz
FREQUENCY TOLERANCE(at 25 )	±10PPM,±30PPM, or specify
FREQUENCY STABILITY OVER OPERATING TEMPERATURE RANGE	±10PPM,±30PPM, or specify
OPERATING TEMPERATURE RANGE	-10+60 , -20+70 ,or specify
SHUNT CAPACITANCE(C0)	7PF Max
DRIVE LEVEL	1-20 μ W (10 μ W typical)
LOAD CAPACITANCE	9PF,16PF or special
AGEING(at 25 )	±3ppm/year Max.
STORAGE TEMPERATURE RANGE	-40+85






## Equivalent Series Resistance(ESR)

Fundamental	
12-40MHz	60 Max

## · DIMENSIONS(unit:mm)

## · RELOW CONDITION

### SK-4M

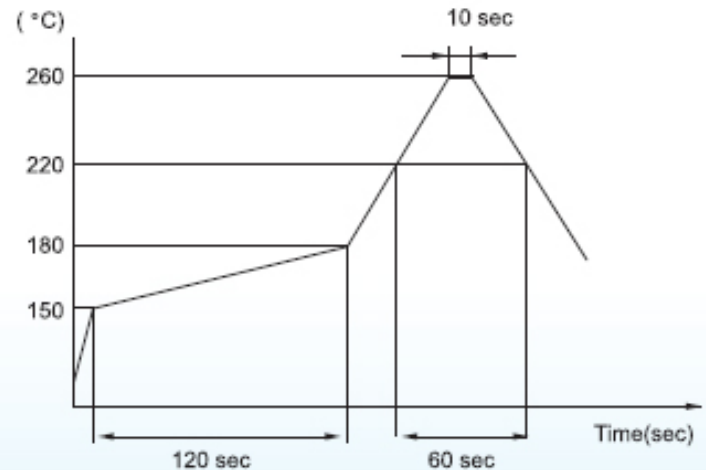

Solder melting point : 220 °C

Total time : 200 sec.Max.